

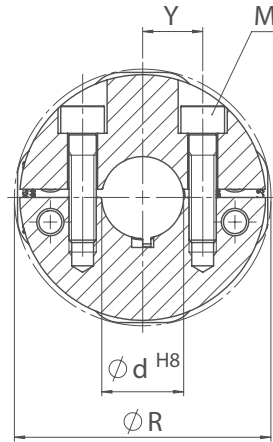


Hub version 2 - Split clamp hub

Standard F

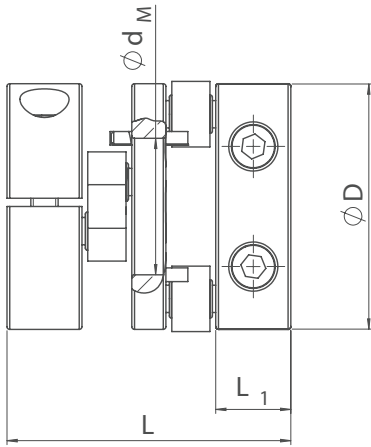

Compact Plus C

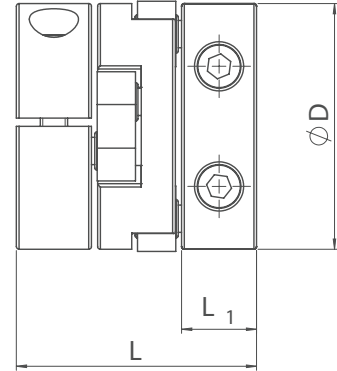

Specifications

Size	D mm	R mm	L mm	L ₁ mm	Y mm	M	d _M mm	Torque		Misalignment			m kg	J kg cm ²	n _{max} 1/min	C _T kNm/rad
								T _{KN} Nm	T _{Kmax} Nm	radial* mm	angular °	axial mm				
F 70	70	72	68	20	18	M8	42	70	112	2	1	1	1	8,4	2.100	13
C 70			59										1,1	8,9	1.700	
F 230	90	94	104	27,5	22	M10	50	230	460	2	1	1	2,7	34	1.450	53
C 230			88										3	36,8	1.150	
F 265	100	104	104	27,5	25	M12	55	265	530	2	1	1	3,2	50,1	1.350	61
C 265			88										3,4	54,2	1.100	
F 320	120	124	104	27,5	30	M12	70	320	635	3	1	1	4,1	100,4	1.250	73
C 320			88										4,2	104,8	1.000	
F 575	120	120	143	38	24	M12	60	575	1.220	3	1	1	6,5	147	1.050	140
C 575			120,5										6,9	155	850	

*Guide value at average rpm.

Mass of coupling size measured at max. bore diameter

R= Swing diameter at radial misalignment=0, M= Size of screw, T_{KN}= Nominal torque, T_{Kmax}= Maximum torque, C_T= Torsional stiffness, m= Mass, J= Moment of inertia

Bore diameters

Size	d mm											
	12	14	16	18	20	22	24	28	30	32	35	40
F 70, C 70	■	■	■	■	■	■	■					
F 230, C 230					■	■	■	■	■			
F 265, C 265							■	■	■	■	■	
F 320, C 320							■	■	■	■	■	■
F 575, C 575									■	■	■	

Combinations of different bore diameters are possible. Bore diameters are equipped with keyway according to DIN 6885/1 as standard. Additional bore diameters as shown in the table are available on special request as well.

Ordering example:

F 70.22 Ø16 Ø20

Semiflex Standard, size 70, bore 16 mm, 20 mm

Ordering example:

C 70.22 Ø16 Ø20

Semiflex Compact Plus, size 70, bore 16 mm, 20 mm